


PIN ASSIGNMENT:

| USB C TYPE(P1) | USB2.0 AM(P2) |
|----------------|---------------|
| A1,B1,A12,B12 | 4 GND |
| A4,B4,A9,B9 | 1 V+ |
| A6 | 3 D+ |
| A7 | 2 D- |
| Shell | Shell Shidd |

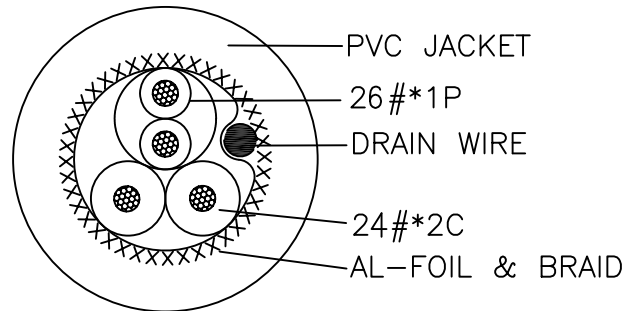

| ⑦ | LIGHT | 1PCS | BLUE LED LIGHT |
|-----|-----------------|------|--|
| ⑥ | TAG | 1PCS | DELTACO TAG |
| ⑤ | HOOD MOLD | 1PCS | BLACK PVC |
| ④ | HOOD MOLD | 1PCS | BLACK PVC |
| ③ | USB2.0 A M | 1PCS | NICKEL PLATED SHELL |
| ② | USB3.1 TYPE C M | 1PCS | NICKEL PLATED SHELL |
| ① | CABLE | 1PCS | (26AWG*1P)+24AWG*2C+AEB OD:5.0±0.2mm BLACK PVC JACKET |
| NO. | PARTS NAME | Q'TY | SPECIFICATION |

NOTES:

1. TESTING: 100% OPEN AND SHORT TEST.
2. ALL MATERIAL BE RoHS COMPLIANT.
3. The maximum current is 2A.

| APPROVED | CHECKED | DRAWN | CUSTOMER: |
|----------|---------|-------|--------------------|
| | | | ITEM NO. USBC-1006 |
| | | | DRAW NO. |
| | | | UNIT mm |
| | | | SCALE NONE |

DESCRIPTION:

USB 2.0 TYPE C 2A CABLE
USB 3.1 TYPE C MALE / USB 2.0 A MALE

